

FIG. 1

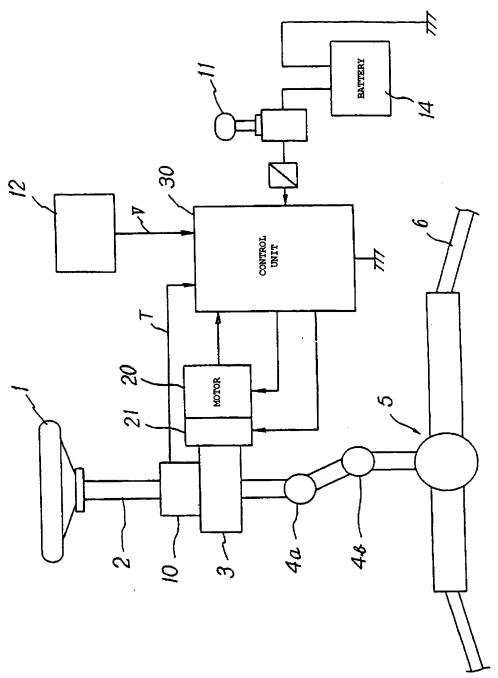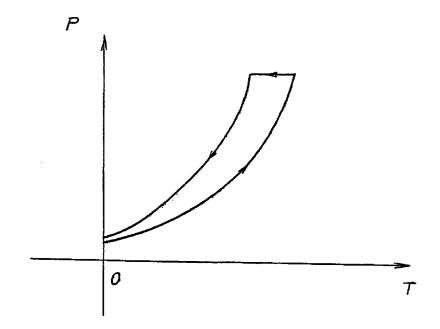

Σ 30 37 38 30B ш 36 35 34 Ω Д 30A STEERING
ASSIST
COMMAND
VALUE
CALCULATOR TA PHASE COMPENSATOR 31 9 15

FIG. 2

FIG. 3



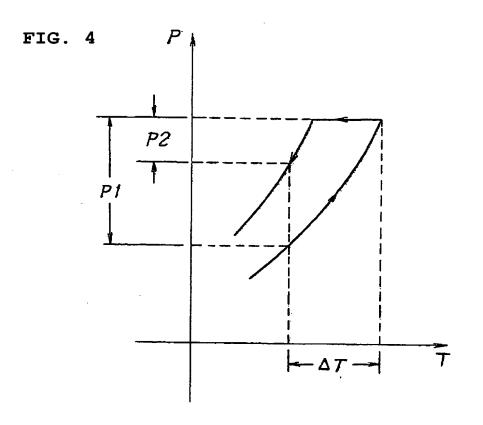


FIG. 5

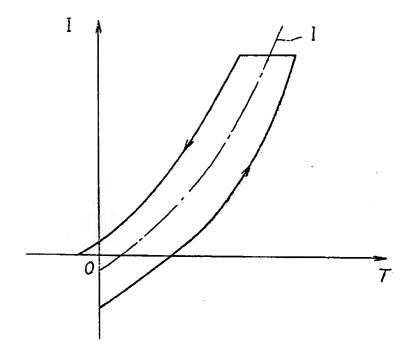


FIG. 6

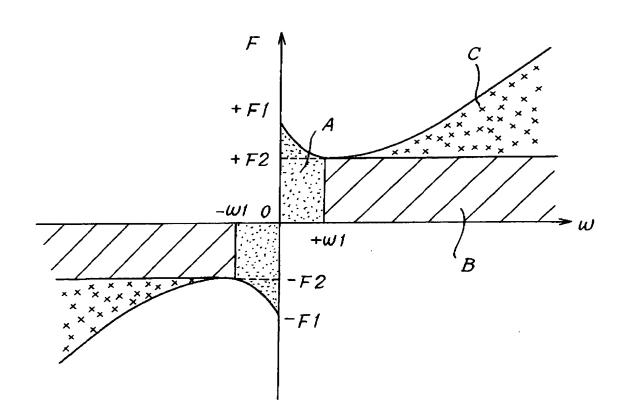
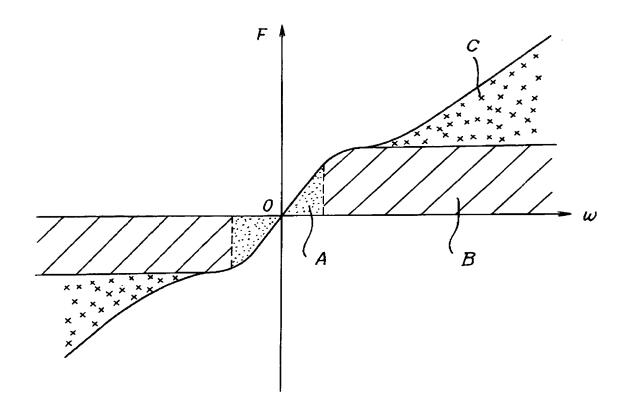


FIG. 7



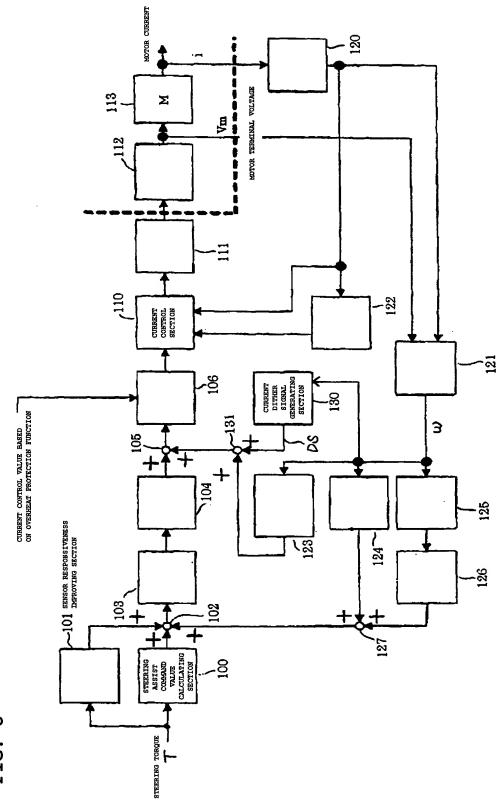


FIG. 8

FIG. 9



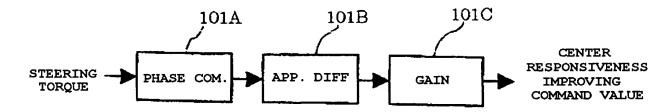


FIG. 10

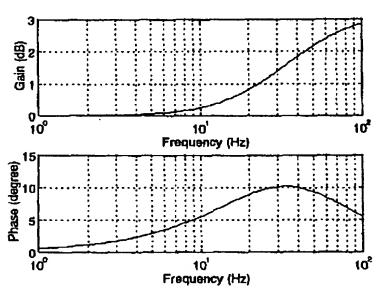


PHASE COMPENSATION

FIG. 11

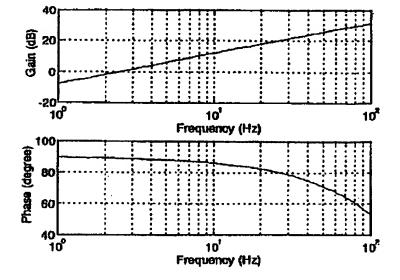


APPROXIMATE DIFFERENTIATION

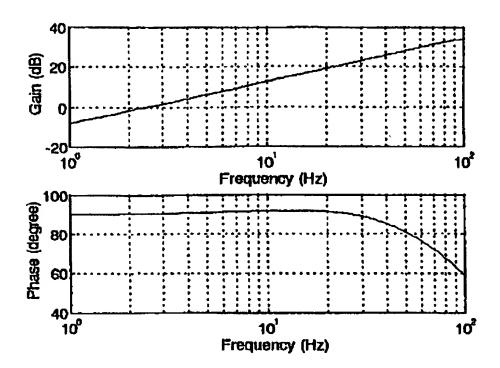


APPROXIMATE DIFFERENTIATION +
PHASE COMPENSATION



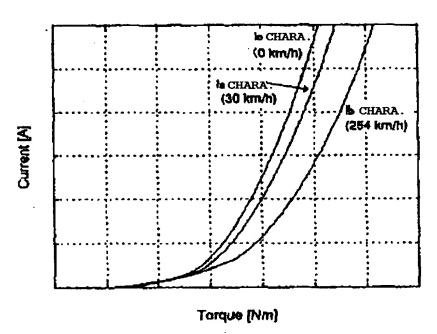

BASIC ASSIST CHARACTERISTIC

FIG. 14

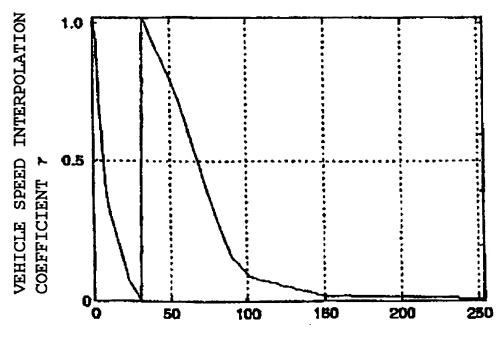

VEHICLE SPEED [km/h]

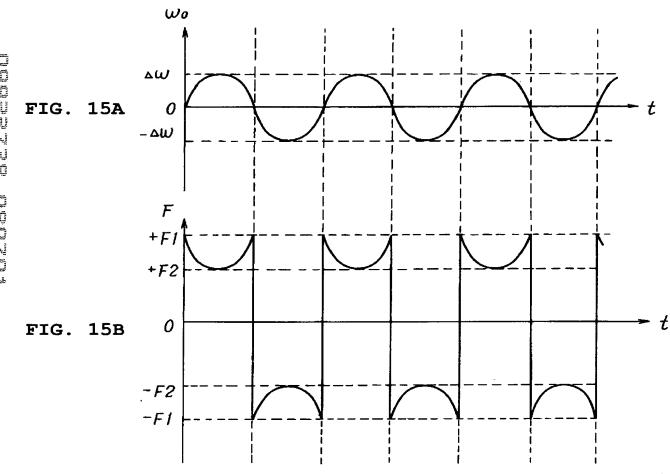


FIG. 16

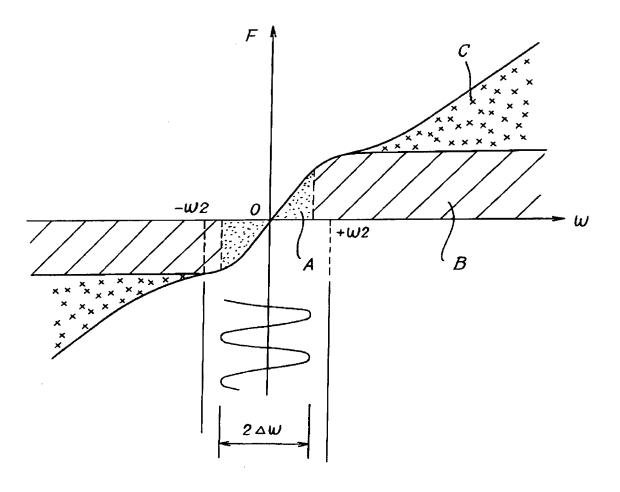


FIG. 17

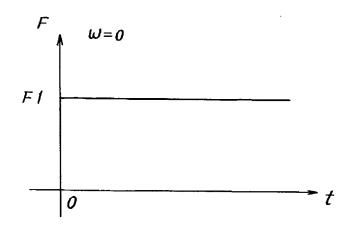


FIG. 18

